



# SELF-PROPELLED SCISSOR LIFTS


## GS™-2668 RT & GS™-3268 RT

## Specifications

MODELS	GS™-2668 RT		GS™-3268 RT	
MEASUREMENTS	Metric	US	Metric	US
Working height maximum*	9.92 m	32 ft	11.75 m	38 ft
<b>A</b> Platform height maximum	7.92 m	26 ft	9.75 m	32 ft
<b>B</b> Platform height - stowed	1.19 m	3 ft 10.75 in	1.31 m	4 ft 3.75 in
<b>C</b> Platform length - outside	2.51 m	8 ft 3 in	2.51 m	8 ft 3 in
- extended	3.61 m	12 ft 1 in	3.61 m	12 ft 1 in
Slide-out platform extension deck	1.10 m	3 ft 6 in	1.10 m	3 ft 6 in
<b>D</b> Platform width - outside	1.55 m	5 ft 1 in	1.55 m	5 ft 1 in
Toeboard height	15 cm	6 in	15 cm	6 in
<b>E</b> Height - stowed**	2.32 m	7 ft 7.5 in	2.57 m	8 ft 5 in
rails lowered	1.70 m	5 ft 7 in	1.83 m	6 ft
<b>F</b> Length - stowed	2.67 m	8 ft 9 in	2.67 m	8 ft 9 in
platform extended	3.75 m	12 ft 4 in	3.75 m	12 ft 4 in
with outriggers	3.43 m	11 ft 3 in	3.43 m	11 ft 3 in
<b>G</b> Width	1.73 m	5 ft 8 in	1.73 m	5 ft 8 in
<b>H</b> Wheelbase	1.85 m	6 ft 1 in	1.85 m	6 ft 1 in
<b>I</b> Ground clearance - centre	21 cm	8 in	21 cm	8 in



PRODUCTIVITY				
Maximum platform occupancy (indoor/outdoor)	4/4	4/4	4/2	4/2
Lift capacity	567 kg	1,250 lbs	454 kg	1,000 lbs
Drive speed - stowed	6.1 km/h	3.8 mph	6.1 km/h	3.8 mph
Drive speed - raised	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph
Gradeability-stowed***	35%	35%	30%	30%
Maximum outrigger levelling:				
front to back	6.6°	6.6°	6.6°	6.6°
side to side	10.6°	10.6°	10.6°	10.6°
Turning radius - inside	1.52 m	5 ft	1.52 m	5 ft
Turning radius - outside	3.68 m	12 ft 1 in	3.68 m	12 ft 1 in
Raise/lower speed	30/35 sec	30/35 sec	40/37 sec	40/37 sec
Controls	proportional	proportional	proportional	proportional
Drive	four wheel	four wheel	four wheel	four wheel
Tyres - rough terrain	30 x 60 cm	12 x 23.5 in	30 x 60 cm	12 x 23.5 in

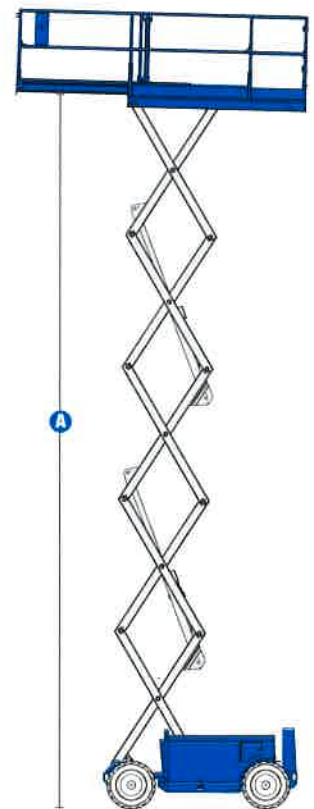

POWER				
Power source	Kubota D-1105 Diesel 24.9 hp (18.6 kW) Kubota petrol/LPG 23 hp (17 kW) Perkins 403D-11 Diesel 26 hp		Kubota D-1105 Diesel 24.9 hp (18.6 kW) Kubota petrol/LPG 23 hp (17 kW) Perkins 403D-11 Diesel 26 hp	
Fuel tank capacity	56.8 L	15 gal	56.8 L	15 gal
Hydraulic system capacity	62.5 L	16.5 gal	62.5 L	16.5 gal

SOUND & VIBRATION LEVELS				
Sound pressure level (ground workstation)	83 dBA	83 dBA	83 dBA	83 dBA
Sound pressure level (platform workstation)	79 dBA	79 dBA	83 dBA	83 dBA
Vibration	<2.5 m/s <sup>2</sup>	<8 ft 2 in/s <sup>2</sup>	<2.5 m/s <sup>2</sup>	<8 ft 2 in/s <sup>2</sup>

WEIGHT****				
	3,268 kg	7,204 lbs	3,776 kg	8,324 lbs
CE max	3,798 kg	8,373 lbs	4,306 kg	9,493 lbs
Weight modifiers for options:				
Outriggers	add 483 kg	1,064 lbs	483 kg	1,064 lbs
Generator	add 48 kg	105 lbs	48 kg	105 lbs
Non marking rough terrain tyres	add 323 kg	712 lbs	323 kg	712 lbs

### STANDARDS COMPLIANCE

CE EN280, PB-10-611-03

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.  
 \*\* Based on RT tyres; deduct 5.8 cm (2 in) for turf and non-marking tyres.  
 \*\*\* Gradeability applies to driving on slopes. Gradeability may vary depending on the weight of options installed on machine. See Operator's Manual for details regarding slope ratings.  
 \*\*\*\* Weight varies depending on options and country standards.